# Complete Shower Room Installation & Operation Manual 8006 8007 SIZE:160X85X210cm SIZE:130X80X210cm

### Cautions in Installation and Using

Thanks for selecting our shower room series. To guarantee safe and normal operation as well as prolong service lifetime. Pls read Instruction carefully before installation.

Note: We are dedicated to improving products quality, find something new in what is old, we would if there is difference in the Instruction until further notice. Any discomfort, we ask your pardon.

Directory
1. Tool contents 3
2.Accessory list 4-6
3. Pipe and drain installation drawing7
4.Installation Procedure8-21
5.Electric appliance instruction 22-25
6.Notes
7. Delivery and storage notice 26
8. Trouble shootings 27

### 1.self-provide tool

Name	Tool
Track level bar	
Tape measure	
Ajustable spanner	200
Rubber hammer	
Phillips srewdriver	
Scissors	
Glass cement	Silicone Scalant
electric drill	
3mm aiguille	
6mm aiguille	
tap drill	

# 2.Partial accessory list

Item	Name	Accessory	Quantity
	(1.1)Tub		1
1	(1.2)Middle backboard		1
	(1.3)Roof		1
	(2.1) backboard		1
2	(2.2) backboard		1
	(2.3)Right backboard		2
	(2.4) fixed door glass		2
	(2.5) flexible door glass	0 0	2
	(3.1)Upper rail		1
	(3.2)Bottom rail		1
3	(3.3)Outer side upright column		2
	(3.4)Front upright column		2
	(3.5)Side upright column		2
	(3.6)Inner side upright column	40.	2

# 2.Partial accessory list

Item	Name	Accessory	Quantity
4	(4)Eccenter		8
5	(5)Knob		2
6	(6)Top shower	- Reg ( Reg 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	1
	(7.1)Handshower		1
7	(7.2)hand shower tube		1
8	(8)Towel bar		1
9	(9)Foot massager		1
10	(10)Soap container	Teste	1
11	(11)Shelf		1
12	(12)Cold and hot water hose	The second secon	2

(3)


## 2.Partial accessory list


Item	Name	Accessory	Quantity
	(13.1)Magnetic strip		2
13	(13.2)Waterproof belt		2
	(13.3)U style thong		4
14	(14)Glass positioning fixture		8
	(15.1)St 4*16mm self tapping srew	Ommo.	32
15	(15.2)St 4*10mm self tapping srew	Ommo.	12

## 3. Pipe and drain installation drawing


Demension: 160\*85\*210cm C=Cold water inlet H=Hot water inlet

D=Drain

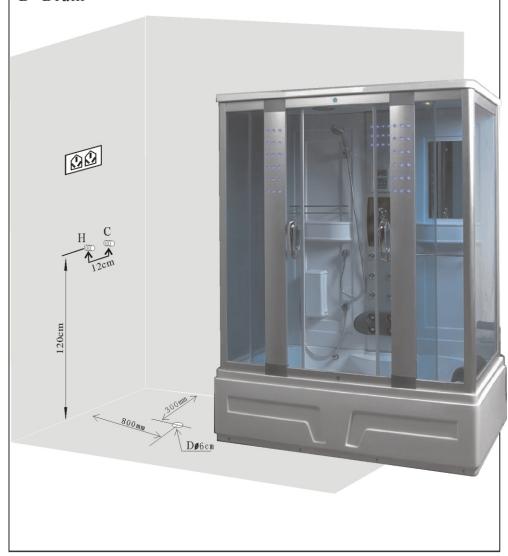




1.) Put track level bar on the tub, and adjust foot's screw by adjustable spanner, and keep it to the leveling

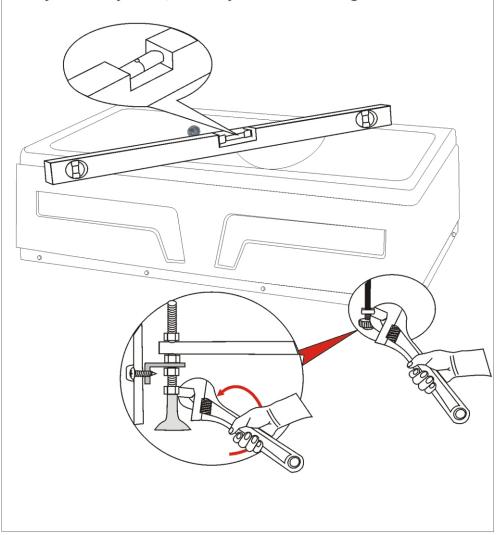


#### 4.Installation Procedure

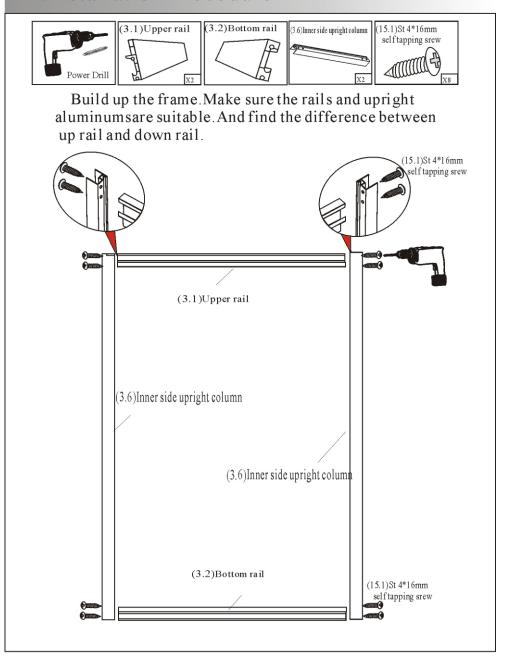





Fit the fixed glass into the frame, after fitting the rubber seal into glass one side, and then knock the glass carefully by hammer.

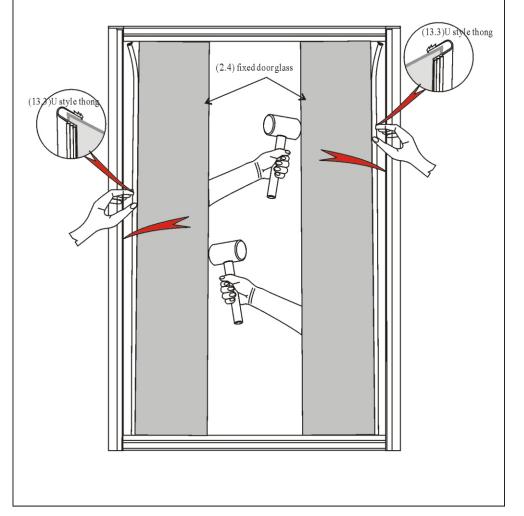


#### 4.Installation Procedure



Fit U rubber seal to glass the other side, then use hammer to make the small aluminum panel (3.4) cover the glass. Then, fix the aluminum panel by screw (15.1)

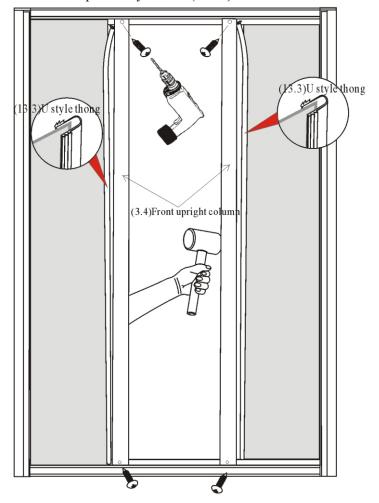





Connect the side glass with front glass frame(3.3)









Put the roller (4) into glass door holes, and adjust the roller screw, then hang the door into up rails. Then fix all of roller, to make sure the door move smoothly.

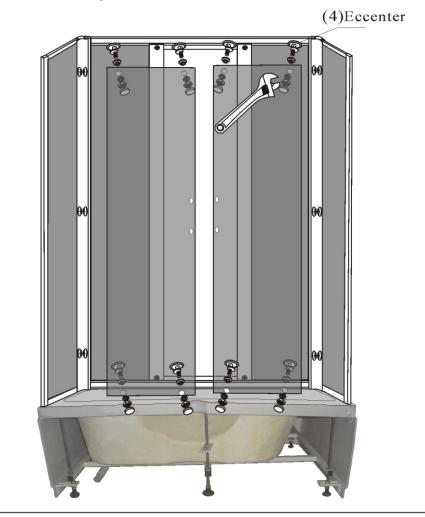


#### 4. Installation Procedure




9.) Fit handle(5) into the door holes, fix them by its screws. Fix the location bar and magestic seal, blocking water seal.

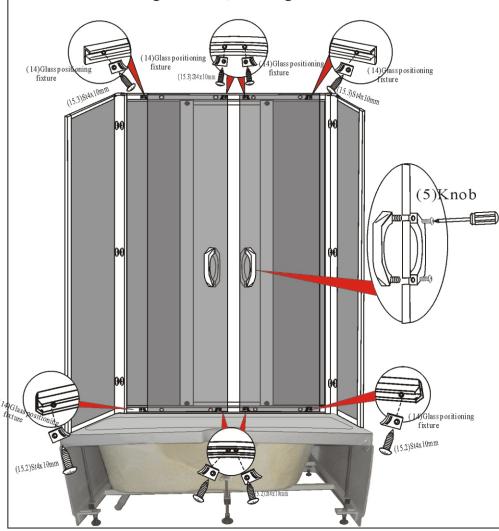





3.) Connect the aluminum panel and 2 pieces of back board glassby screws.

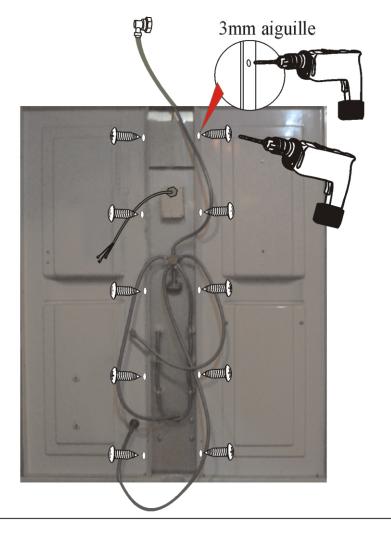


## 4.Installation Procedure

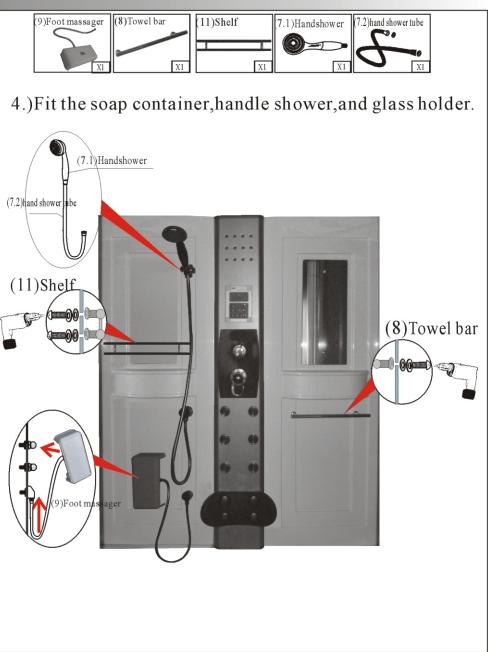

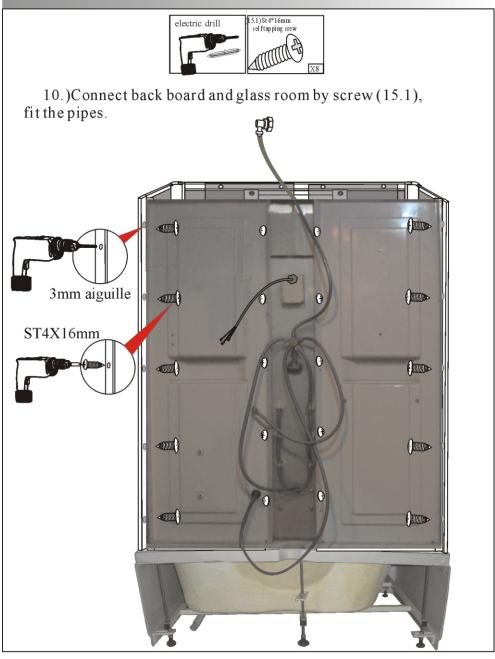



### 4.Installation Procedure

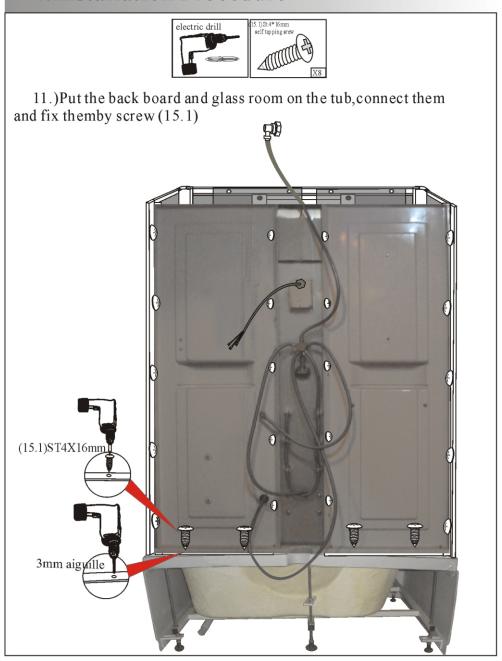

(17)

(18)




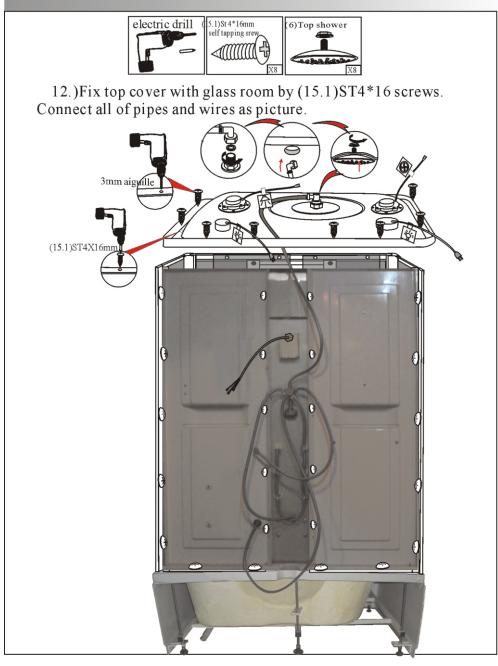





13. Connect cold and hot water with installed shower room by adjustable spanner, then plug in .

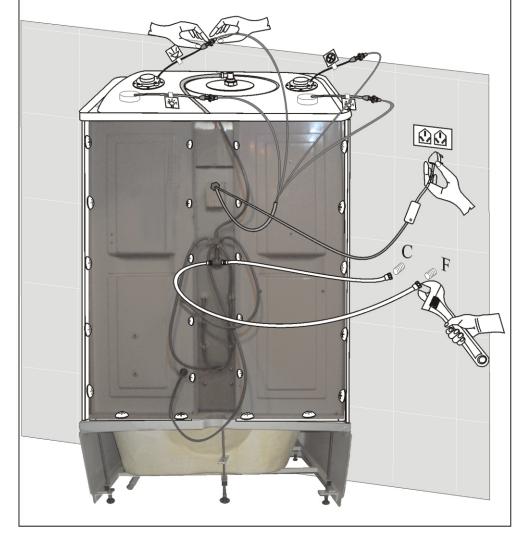

#### Electric appliance instruction

The electrical things used in the product all have the electrical leakage protection and are connected to the ground wire. During installation proffessional workers should responsible for it.

Voltage:220V+10%

Water pressure: 0.1-0.4 Mpa

Power line section must above 2.5mm, it must have dependent power control switch. Power plug's demension is three- core 16A, We would responsible for product quality if you install and operate according to instruction.

#### Control panel instruction



#### 5 Electric appliance instruction

- 1. Please power the controller first. After you push any position of the touch screen, the LCD screen will be light, and the controller is ready for working.
- 2. Push (FAN' key, fan icon flash, the fan working, you can push (FAN' key again to stop fan working.
  - 3. Push 'Top Light' key, the top lamp light, you can push
  - 'Top Light' key again to stop top lamp working. Push Back Light' key, the back lamp light, you can push

'Back Light' key again to stop back lamp working.

- 4. Push 'FM' key on the panel once, the radio working, the number window show the current radio frequency. Push 'FM' key again, radio turn off.
- 5. Volume setting: when radio is operation, push 'Volume up' or 'Volumedown' key to set up volume, push the key after 3 seconds later, the volume continuously up or down.
- 6. Finish washing, push POWER' key to turn off the controller. At this time, the LCD screen display count down for 60 second, the controller automatic turn off the Fan, Light, Radio,
- CD. The controller will standing again after 60 second. You can push 'POWER' key to restart the controller.

#### 5 Electric appliance instruction

#### Parameter:

Voltage Inlet	AC 210-230V
Frequency	50HZ
Control System Voltage	DC 12V
Lamp Power	AC 12V,10W
Fan Power	DC 12V,2W
Radio Power	5W

#### 6:Notes

- 1. It is unadvisable to take a shower after drunk.
- 2.It is unadvisable to have a shower immediately after acute sports.
- 3. Please avoid bath or shower in morning.
- 4. Keep the temperature of dressing room near to the bathroomS
- 5.If you feel discomfortable while having a shower, you should go out of the shower room as soon as possible.
- 6. The time of shower is advisable to be between 15 minutes and 20 minutes, no longer.
- 7.Drink water to supplement moisture after shower or bathing.
- 8. People who suffer from heart disease, high blood pressure, diabetes or who feel unwell or pregnant woman are unadvisable to have bathing, massage or shower.

#### 7,Delivery and storage notice

- 1, It is prohibited to store organic solvent together, such as formic acid and methanol.
- 2. Handle with care if it need transport. Heavy stress, mechanical impact and sharp pounding is prohibited.
- 3. It should keep it dry and airy and make sure there is no etchant gas.

#### 8, Trouble shootings

Troble	Cause	Remedy
	1.Electric power don't connect well,leak swtich is cut off.	Access to power
No power	2. Fuse wire is broken, switch of control panel is failure.	Maintain or replace
	3.GFCI is out of work	Check GFCI
	1.water pressure is abnormal	Check water pressure
No head shower	2.Cold and hot water switch is closed.	Turn on the cold and hot water switch
	3.chocking nozzle	Clean
Watanninalaalaa	1.Seal ring damaged	Replace seal ring
Water pipe leakage	2. Tie in dont connect well	Connect it again
N. 1:	1.Connecting wire is cut	Make connection
No radio	2.Loudspeaker is broken	Replace a new one
Phone unuable	1. Telephone wire dont connect well	To make contact telephone line
Thone undable	2.Control panel is broken	Maintain or replace
	1. Bulb is broken, ballast is broken	Replace
No light	2.Break of ballast	To make contact
	3. Control panel is broken	Maintain or replace
	1.Fan is broken	Replace
No exhaust	2. Tie-in is not connect well	To make contact
	3. Control panel is broken	Maintain or replace

If complete shower room cant work normally, please check it as compare above then obstacle avoidance.

If customers cant make sure the cause of obstacle or lack of ability mantianance. Please contact distributer.